


TWIN TWIST, FLOOR MODEL PRESSURIZED SOFT SERVE FREEZER

Best Warranty
In The Industry



- High capacity, hard-working, space-saving floor unit guarantees years of dependable service
- Special calibrated electronic thermistor assures optimum product quality and quick response during peak draw periods
- Standard night switches provide refrigerated overnight mix storage, saving both labor and energy
- Self-sharpening, nonmetallic auger flights for reliable service
- Optional remote mix pump permits use of large capacity mix containers, keeping mix handling to a minimum
- Perfect for high volume operations such as fast food locations, drive-ins, theme parks, institutions, and recreational facilities
- Remote air-cooled condenser optional

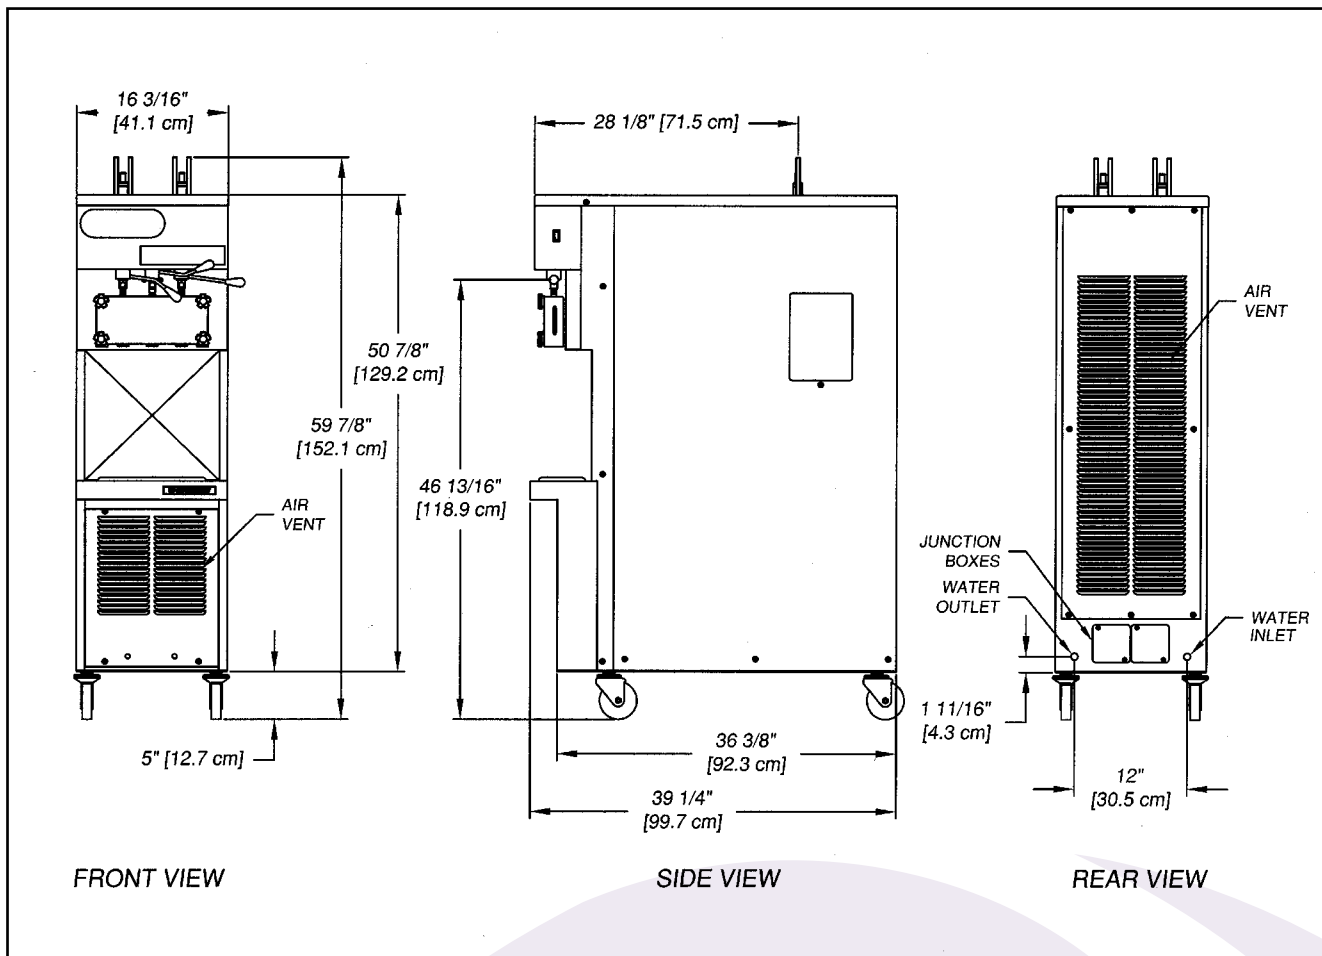

SPECIFICATIONS	MODEL 238R	
DIMENSIONS	FREEZER	WITH CRATE
Depth	39 1/4" (99.7 cm)	51" (129.5 cm)
Width	16 3/16" (41.1 cm)	25" (63.5 cm)
Height	59 7/8" (152.1 cm)	67" (170 cm)
WEIGHT	FREEZER	WITH CRATE
	710 lbs. (322.1 kg)	820 lbs. (372 kg)
ELECTRICAL	1 phase, 208/230 volt , approximately 10 total running amps per barrel, 35 amp maximum fuse or HACR circuit breaker per barrel, or 40 amp maximum regular circuit breaker	3 phase, 208/230 volt , approximately 8 total running amps per barrel, 25 amp maximum fuse or HACR type circuit breaker or 30 amp circuit breaker size.
REFRIGERANT	R404	
COMPRESSOR	(2) 14,000 BTU/hr.	
DRIVE MOTOR	Two motors, 2 H.P. each	
COOLING	Water Cooled; Air Cooled; Remote Available	
PLUMBING FITTINGS	Requires 1/2" N.P.T. water and drain fittings.	
FREEZING CYLINDER VOLUME	(Two) 1.13 gallon (4.5 qt; 4.3 litre) each	
OPTIONS/ACCESSORIES	Model 219 or U3-02 Remote Mix Pump, cup dispensers, shake spinner, wash/drain kit, pump cleaner tray, air cooled remote condenser.	
WARRANTY	One-year parts and labor warranty; five year warranty on compressor, evaporator/hopper assembly, drive motor, speed reducers, auger shaft, and auger flights (against breakage).	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:



502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: commercial@stoelting.com
 Internet: www.stoelting.com

Certified, Listed and/or
 Recognized by:

